

STUDY ABOUT THE RELIABILITY OF THE E_sR_c 1400 BUCKET WHEEL EXCAVATORS USED IN OPEN-PIT COAL MINES IN OLTENIA

DUMITRU JULA¹, OVIDIU-BOGDAN TOMUȘ²

Abstract: The analysis of mechanical failures occurring in excavators E_sR_c 1400, that operate in the Oltenia lignite open pit mines, was based on the information collected on faults from 8 excavators monitored during operation in 2010 year. Fault analysis was performed on the main subassemblies of excavators, aiming to highlight the type of defect, the damaged component, the number of defects per subassembly and per entire excavator and also on the times when the excavator is out of order as a result of repairing.

Keywords: lignite, analysis, excavators, defects, repairing, Oltenia.

1. ANALYSIS OF MECHANICAL FAILURES

The main types of failures by elements and components occurred during the analyzed period are at:

- the bucket wheel drive: drive gearbox failure (attack pinion) and the bearings of the first stage; gearbox lubrication system failure; screw fixation loosening of the gearbox semi-carasses and of the gearbox as a whole; screw fixation loosening of the electric motor to gearbox; cardan shaft breaking;

- the bucket wheel: cracks in stator ring and wheel; breaking of buckets, ear catchers, bolts and wedges, teeth; lubrication system failure of main shaft. To be noted that teeth wear is not considered a failure, unless this is a premature one;

- the crawler track mechanism: breaking of tracks shoes (the most frequent); breaking of the connecting pins; connecting pins going out of holes as a result of improper fixation; premature worn of the spurs; tracks stretching system failure; failure of tracks gearbox drive; breakage of the coupling between the motor and the gearbox (the most common);

¹ *Assoc. Professor Eng. Ph.D., University of Petroșani, juladumitru@yahoo.com*

² *Lecturer Eng. Ph.D., University of Petroșani, tobogdan2002@yahoo.com*

- the excavator inner belt conveyor system: destruction of coupling staples(the most common); the failure of idlers; the destruction of shock absorbing idlers; the deterioration of belt wipers; the breakage of the coupling between the motor and gearbox; drive and return drum failure by breaking the axles and bearings; deterioration of discharges and bunkers; jammed parts; deterioration of visiting and maintenance platforms for the belts.

- the transfer feeder: the premature destruction of belts staples; uncoupling of tracks; breaking of shoes and connecting pins of the tracks; tracks stretching system failure; jammed parts;

- the boom lifting - lowering mechanism: breakage of boom supporting ropes; rope driving pulleys failure; unbalancing tensions in ropes; failure of the coupling between the motor and the gear drive winch;

- the mechanism for swiveling the excavator's superstructure: destruction of the drive gears; un-calibration of control clutches.

One usual way of fault analysis is using the Pareto diagrams that helps to obtain a distribution (quantity or percentage) of the defects in the operation of excavators, for a certain period of time, in descending order of occurrence frequency and importance weight.

Such a diagram allows to analyze all types of faults and, based on this, to rank the problem solving, giving priority to most serious problems. Based on this, the remedial and elimination of faults are established in the order of importance, percentage, frequency. Therefore, we can say that drawing the Pareto diagrams is the first phase in an action for improvement.

An analysis with Pareto diagrams shows that most times, eliminating the first 2-3 causes one can result the elimination of 60-70% of the deficiencies. Although it may seem simple, these diagrams are recognized as extremely useful in analyzing and evaluating faults in a cause-frequency basis. They are used when the types of faults or causes are well known, for a first association, connection, relationship between faults and their causes. Following the logical sequence of steps found in the literature, the Pareto diagrams were drawn-up, which bring out the frequency of mechanical failures occurring in excavators ESRC-1400.

Based on the information taken from excavator's operation records there were centralized the types, frequency and total number of faults occurring during the period specified for each subset defective part, presented in table 1.

In figures 1, a) and b) the Pareto diagrams are presented in absolute frequency, and in Figures 2, a) and b, the same diagrams are shown based on cumulative frequency.

From the analysis of Pareto diagrams results that approximately 60% of the defects occurring in operation of the excavators are caused by two subassemblies, respectively the excavator tracking system and the on board belt conveyor system.

In order to increase the failure safe operation of the excavator and the reduction of maintenance costs, it is necessary to upgrade the two previously mentioned subassemblies.

The operational behavior in of the tracking mechanism of the excavator is very well highlighted by the present reliability study conducted to reveal the availability of all excavators, seen from the point of view of this subassembly.

Table.1. Necessary data for drawing-up the Pareto diagram

Code	Subassembly failed	No. of faults	Total cumulated	Percent from total	Percent cumulated
A	Tracking system	76	76	29,23	29,23
B	On board belt conveyors	73	149	28,08	57,31
C	Transfer feeder	28	177	10,77	68,08
D	Bucket wheel	26	203	10,00	78,08
E	Swiveling mechanism	24	227	9,23	87,31
F	Bucket wheel drive	18	245	6,92	94,23
G	Boom lifting - lowering mechanism	12	257	4,62	98,85
H	Other subassemblies *	3	260	1,15	100
	Total	260	-	100	-

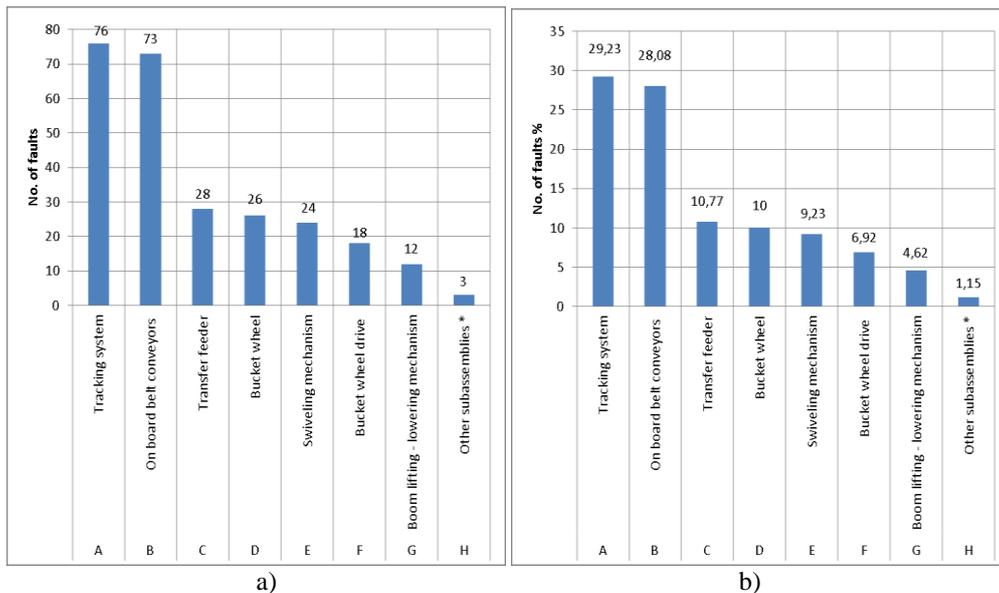


Fig.1. Pareto diagram in absolute frequency of failures expressed in no. of failures, a) and percentage, b)

2. STUDY OF THE RELIABILITY OF THE TRACK MECHANISM OF E_sR_c 1400 EXCAVATOR

In order to establish the moments of failure of the tracking mechanism, two databases were used:

- records for faults situation, outlining the day and time the fault occurred;

- records with the descriptions of the actual operation times, by days, of each excavator, which only takes into account the time that the excavator operated in coal or overburden, and the nature of all causes of downtimes of excavators.

Analyzing and interpreting the two databases, we obtained the string consisting of $n = 71$ values, ordered ascending, which represents the number of actual operating hours of effective functioning of the driving mechanisms until the failure, for the eight excavators, during a year : 10; 12; 13; 14; 15; 15; 16; 17; 17; 17; 18; 18; 25; 26; 28; 28; 29; 32; 33; 33; 35; 42; 43; 45; 50; 51; 54; 61; 64; 66; 69; 73; 92; 98; 100; 101; 105; 109; 113; 133; 137; 140; 151; 152; 156; 157; 162; 163; 170; 194; 202; 229; 320; 339; 341; 354; 370; 386; 406; 411; 540; 540; 612; 622; 638; 698; 749; 773; 801; 836; 1044.

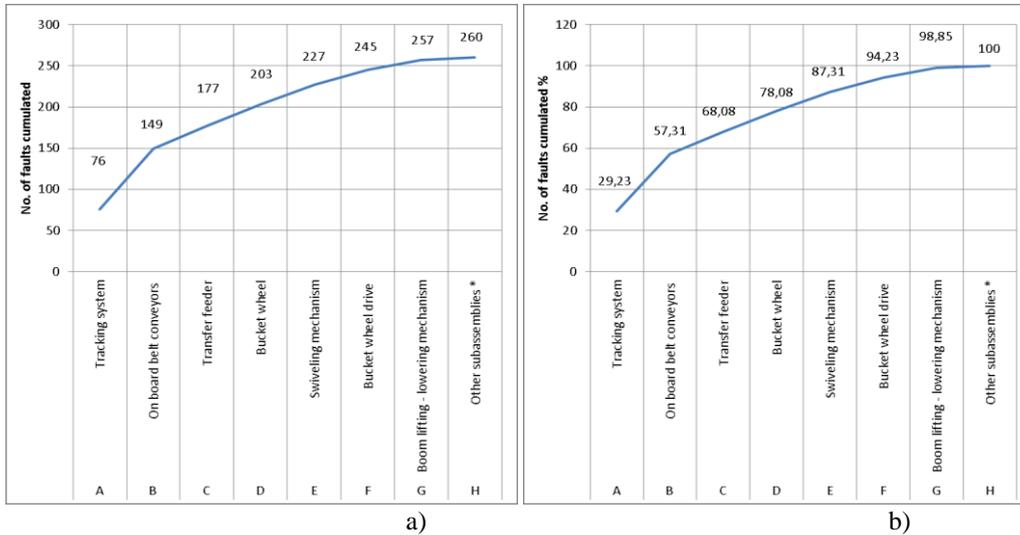


Fig.2. Pareto diagram in cumulative frequency of failures expressed in no. of failures, a) and percentage, b)

This set of values can be considered an S1 type of statistical series in which all values are disjoint, for which, by default, we can be observed a large dispersion of values, the difference between the extreme values being very high. The values of the empirical repartition function, $\hat{F}(t_i)$ are shown in table 2.

The empirical repartition function values above were calculated with the formula:

$$\hat{F}(t_i) = \frac{i - 0,3}{n + 0,4} \quad (1)$$

where, i is the rank number and n is the total number of values in the string.

Considering the nature of the subassembly in the study, it is assumed that the times of failure, considered between two consecutive failures are distributed following

a Weibull distribution law, as this will be confirmed or infirmed using concordance tests.

Table 2. Values empirical repartition $\hat{F}(t_i)$ function

1	0,009804	16	0,219888	31	0,429972	46	0,640056	61	0,850140
2	0,023810	17	0,233894	32	0,443978	47	0,654062	62	0,864146
3	0,037815	18	0,247899	33	0,457983	48	0,668067	63	0,878151
4	0,051821	19	0,261905	34	0,471989	49	0,682073	64	0,892157
5	0,065826	20	0,275910	35	0,485994	50	0,696078	65	0,906162
6	0,079832	21	0,289916	36	0,500000	51	0,710084	66	0,920168
7	0,093838	22	0,303922	37	0,514006	52	0,724090	67	0,934174
8	0,107843	23	0,317927	38	0,528011	53	0,738095	68	0,948179
9	0,121849	24	0,331933	39	0,542017	54	0,752101	69	0,962185
10	0,135854	25	0,345938	40	0,556022	55	0,766106	70	0,976190
11	0,149860	26	0,359944	41	0,570028	56	0,780112	71	0,990196
12	0,163866	27	0,373950	42	0,584034	57	0,794118		
13	0,177871	28	0,387955	43	0,598039	58	0,808123		
14	0,191877	29	0,401961	44	0,612045	59	0,822129		
15	0,205882	30	0,415966	45	0,626050	60	0,836134		

The probability density of failures for tri-parametric Weibull distribution is expressed by the relation:

$$f(t; \eta, \beta, \gamma) = \frac{\beta}{\eta} \left(\frac{t - \gamma}{\eta} \right)^{\beta - 1} \exp \left[- \left(\frac{t - \gamma}{\eta} \right)^\beta \right] \quad (2)$$

where β is the shape parameter, η is real scale parameter and γ is the initializing parameter.

The parameters of a tri-parametric Weibull distribution can be calculated using the method of moments. The shape parameter β is obtained by solving the equation

$$CV = \frac{\sqrt{\Gamma\left(\frac{2}{\beta} + 1\right) - \left[\Gamma\left(\frac{1}{\beta} + 1\right)\right]^2}}{\Gamma\left(\frac{1}{\beta} + 1\right)} \quad (3)$$

where CV is the coefficient of variation, which is obtained using the relation

$$CV = \frac{s}{m} \quad (4)$$

where s is the standard deviation and m is the mean value of the string.

The scale parameter η is calculated with

$$\eta = s / C_{\beta} \quad (5)$$

and initializing parameter γ with the relation

$$\gamma = m - \eta K_{\beta} \quad (6)$$

In these relations K_{β} and C_{β} are coefficients dependent on the shape parameter β , which are calculated from the relations:

$$K_{\beta} = \Gamma\left(\frac{1}{\beta} + 1\right) \quad (7)$$

$$C_{\beta} = \sqrt{\Gamma\left(\frac{2}{\beta} + 1\right) - \left[\Gamma\left(\frac{1}{\beta} + 1\right)\right]^2} \quad (8)$$

For the data above, with the mean value $m = 207,225352$ and standard deviation $s = 249,051756$ the parameters of the Weibull distribution are obtained are: $\beta = 0,836403$; $\eta = 188,528901$; $\gamma = 2,3607 \times 10^{-6}$; $K_{\beta} = 1,099170$; $C_{\beta} = 1,321027$.

By calculating the elements needed to define the distribution and verification of the Weibullian character of the analyzed product behavior using the Kolmogorov-Smirnov concordance test, we obtain the maximum distance, $D_{\max} = 0,085254 < D_{\alpha}$, $n = D80,71 = 0,124985$, $D80,71$ being the Kolmogorov-Smirnov test feature for a confidence level of 80% and $n = 71$ values, so that the Weibullian character of failure times distribution is validated.

The tri-parametric Weibull distribution parameters characteristics are calculated with the equations:

- reliability function:

$$R(t; \eta, \beta, \gamma) = \exp\left[-\left(\frac{t - \gamma}{\eta}\right)^{\beta}\right], \quad \% \quad (9)$$

- the non-reliability function:

$$F(t; \eta, \beta, \gamma) = 1 - \exp\left[-\left(\frac{t - \gamma}{\eta}\right)^{\beta}\right], \quad \% \quad (10)$$

- intensity or rate of failure:

$$z(t; \eta, \beta, \gamma) = \frac{\beta}{\eta} \left(\frac{t - \gamma}{\eta} \right)^{\beta-1}, \text{ def/h}; \quad (11)$$

- average uptime:

$$m = \gamma + \eta \Gamma\left(1 + \frac{1}{\beta}\right), \text{ h}; \quad (12)$$

- median of uptimes:

$$t_{med} = \gamma + \eta(-\ln 0,5)^{1/\beta}, \text{ h}. \quad (13)$$

In figures 3, 4, 5 and 6 are shown the variations of the reliability indicators specific to the tracking mechanism of the rotor excavators.

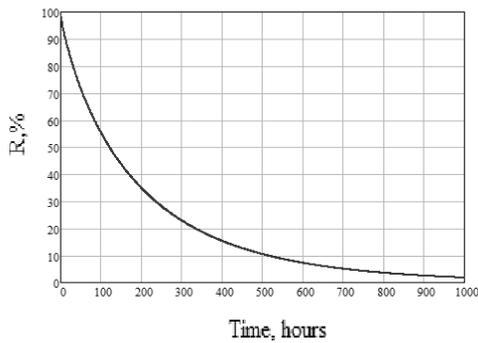


Fig. 3. Variation of the reliability function for the track mechanism of the excavator

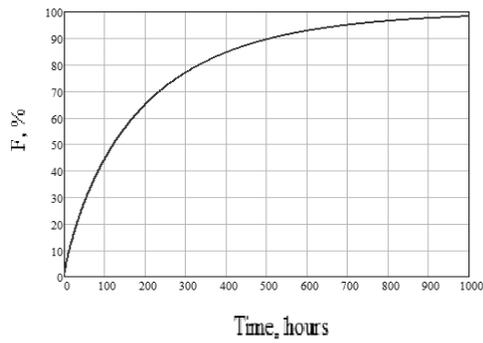


Fig. 4. Variation of the non-reliability function for the track mechanism of the excavator

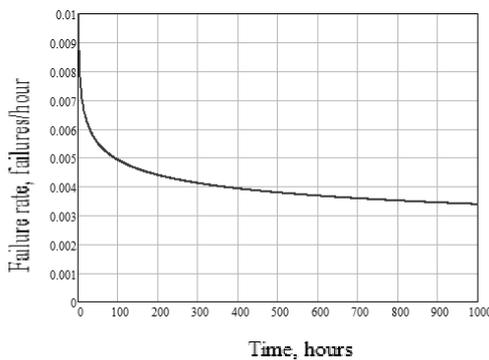


Fig. 5. Variation of the intensity of failure

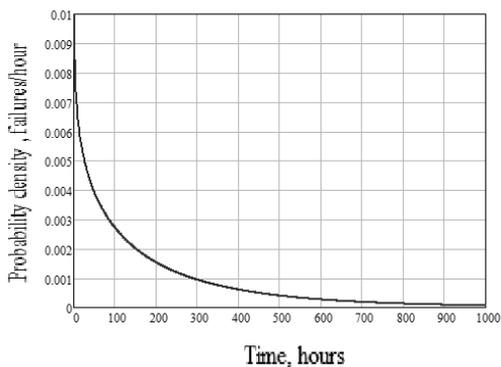


Fig. 6. The variation of the density of probability of time to occurrence of faults

4. CONCLUSIONS

The average time of fault-safe operation of the track mechanism of the excavator is 207 hours, and the median time of good functioning is 121 hours.

Since the probability density diagram of occurrence of failures is strongly asymmetric, the median time of good functioning better characterizes the functionality of the moving mechanism, giving a good functioning of 121 hours, which is a very low value.

Considering that an excavator functions on average 15 hours a day, is expected that every 8 days the moving mechanism has a malfunction, which shows a very low level of reliability.

This is well evidenced by the analysis of reliability diagrams, which show that the probability of the moving mechanism not getting damaged after 100 hours of actual functioning is only 60%, which is an extremely low value.

The low reliability of the moving mechanism requires its modernization with priority in order to increase the use of the excavator.

REFERENCES

- [1]. **Dumitrescu, I., et al.** *Issues concerning the increase of the uptime for the cylindrical gear that is part of the rotating system of E_sR_c 1400 bucket wheel excavator.* Annals of the University of Petrosani Mechanical Engineering, 2010.
- [2]. **Jula, D., et al.** *Assessment of linear hydraulic engine reliability of handling the machines bucket for loading, transportation and storage used in mining.* Annals of the University of Petrosani Mechanical Engineering, 2013, 15.
- [3]. **Jula, D., et al.** *Considerations on the Reliability of Machines and Equipment Used in the Open Pit Mines.* Annals of the University of Petroşani, Mechanical Engineering, pg, 2006, 155-172.
- [4]. **Jula, D., et al.** *Safety couplings used in the mechanical transmission of the rotating system on 1400 esrc bucket wheel excavators.* Annals of the University of Petrosani Mechanical Engineering, 2010.
- [5]. **Jula D., Dumitrescu I** - Fiabilitatea sistemelor de transport. Editura Focus, Petroşani, 2009.
- [6]. **Kovacs I., Tomuş O.B., Jula D.** - *Assessment on Spare Parts Requirement Based on Reliability Theory.* MicroCAD 2016, International Scientific Conference, 21 - 22 April 2016, University of Miskolc, Miskolc (Hungary)